



CLG2030H-35H Diesel Pneumatic Tire Forklifts

 **LIUGONG**



SPECIFICATIONS

General	1	Model			CLG2030H	CLG2035H
	2	Power Type			Diesel	Diesel
	3	Base Capacity	@ rated load center	kg	3000	3500
	4	Load Center		mm	500	500
Weights	5	Service Weight	unloaded	kg	4480	4800
	6	Axle Load	loaded/unloaded, front	kg	6582/1837	7304/1920
	7		loaded/unloaded, rear	kg	898/2643	996/2880
Tires	8	Tire Type			Pneumatic	Pneumatic
	9	Wheels	front / rear		2 / 2	2 / 2
	10	Wheelbase		mm	1700	1700
	11	Tire Size	front		28x9-15-14PR	28x9-15-14PR
	12		rear		6.50-10-10PR	6.50-10-10PR
	13	Tread Width	front/rear	mm	1000/992	1000/992
Mast	14	Max. Fork Height	with std 2-stage mast	mm	3000	3000
	15	Freelift	with std 2-stage mast	mm	145	145
	16	Height, Upright Lowered	with std 2-stage mast	mm	2195	2195
	17	Height, Upright Extended	with std 2-stage mast	mm	4088	4088
	18	Mast Tilt, Fwd/Back	with std 2-stage mast	deg	6° / 12°	6° / 12°
	19	Carriage	width	mm	1100	1100
	20	Fork Spread	minimum/maximum	mm	272/1072	272/1072
	21	Fork Dimension	T x W x L	mm	45 x 122 x 1070	50x 122 x 1070
Chassis	22	Length to Fork Face	with std 2-stage mast	mm	2672	2710
	23	Overall Width		mm	1225	1225
	24	Overhead Guard Height		mm	2200	2200
	25	Turning Radius	minimum outside	mm	2400	2435
	26	Fork Overhang	with std 2-stage mast	mm	477	477
	27	Right Angle Stack	add load length and clearance	mm	4147	4192
	28	Ground Clearance	minimum loaded	mm	140	140
	29		center of wheelbase	mm	165	165
Performance	30	Travel Speed	loaded/unloaded	km/h	18.5/19	18.5/19
	31	Lift Speed	loaded/unloaded	m/s	0.53/0.59	0.53/0.59
	32	Lower Speed	loaded/unloaded	m/s	0.5/0.4	0.5/0.4
	33	Max. Drawbar Pull	loaded	kg	1900	1900
	34	Max. Gradeability	loaded / unloaded	%	20 /31	20 /31
Systems	35	Brakes	service		Foot / Hyd	Foot / Hyd
	36		parking		Hand / Mech	Hand / Mech
	37	Engine	manufacturer		Yanmar	Yanmar
	38		model		4TNE98-BQFLC	4TNE98-BQFLC
	39		emission compliance		EPA/Euro Tier III	EPA/Euro Tier III
	40		cylinders		4	4
	41		displacement	liter	3.318	3.318
	42		rated power	kw/rpm	42.1/2300	42.1/2300
	43		max. torque	N.m/rpm	196.3/1700	196.3/1700

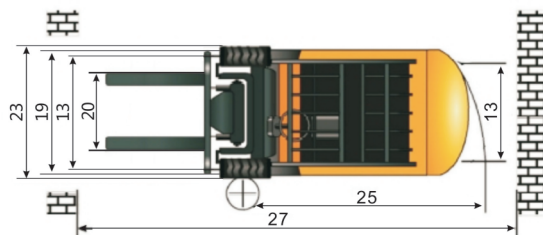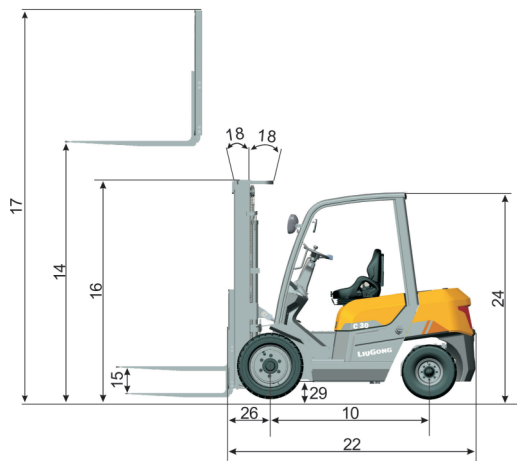

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

03/2017 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.